


DATA SHEET


SPECIFICATIONS

article number	S4LFT1330-373	
design wavelength [nm]	450	
effective focal length [mm]	338.9	
max. entrance beam-Ø [mm]	20.0	30.0
aperture stop distance [mm]	37.5	46.0
working distance [mm]	270.1	270.0
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1	180 x 180 25.0 / 51.0	115 x 115 28.0 / 64.0
max. telecentricity error [°]	17.7	11.2
total transmission [%]	> 98	
lens material	fused silica	
LIDT (coating)	not specified	
SP and USP usable	yes	
weight [kg]	1.5	
cover glass	S4LPG2175-373	
absorption [ppm]	not specified	
cleanliness	not specified	


SPOT FOR 20.0mm BEAM DIAMETER

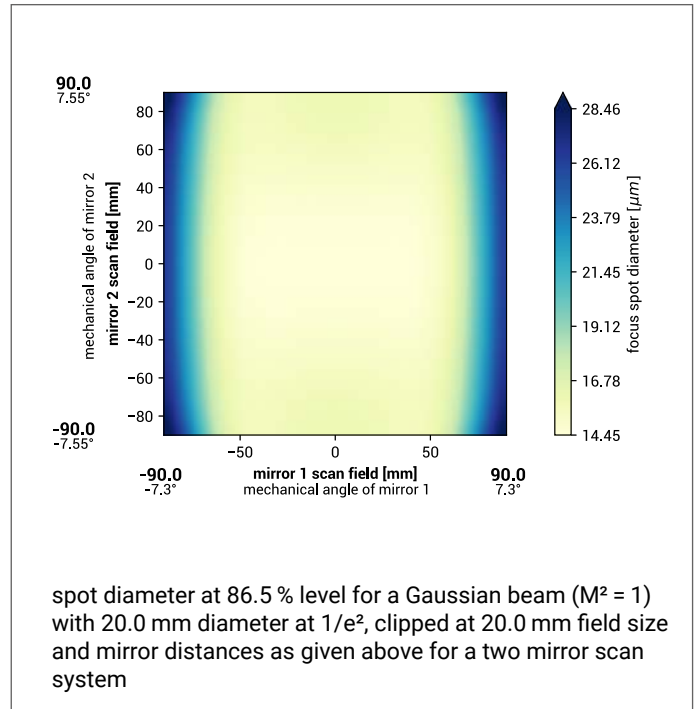

BACK REFLECTION POSITION

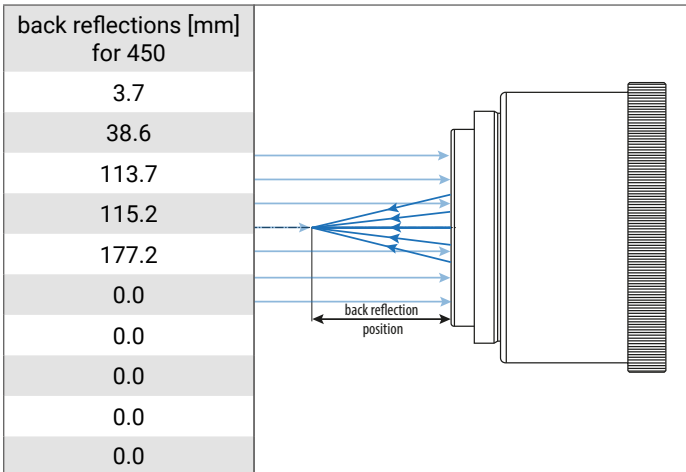

SPOT FOR 30.0mm BEAM DIAMETER

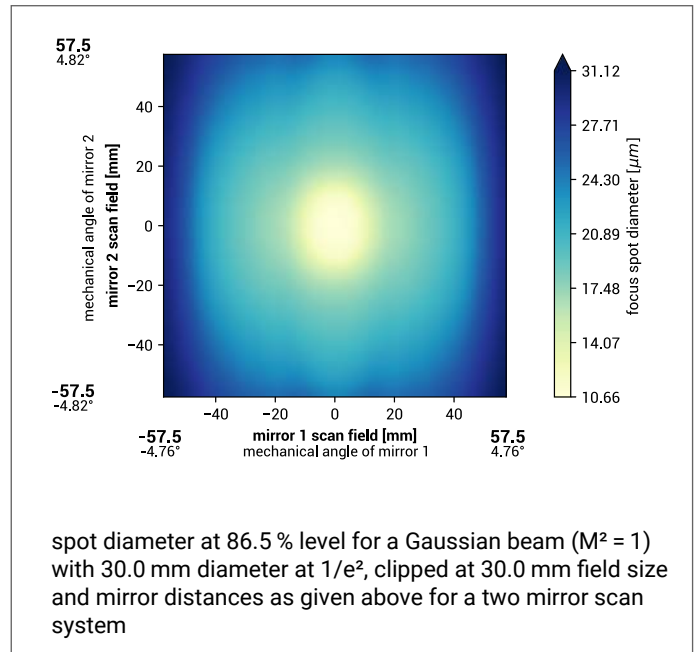

REMARKS

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.

All information contained in this data sheet is for information purposes only and is not binding. The content is subject to change at any time without notification, all information without guarantee. We reserve the right to make constructional changes in the course of product improvement. Copyright © Sill Optics GmbH • All rights reserved

Sill Optics GmbH • Johann-Höllfritsch-Straße 13 • D-90530 Wendelstein • +49 9129 9023-0 • Published: 26.07.2023